





Application: offices, shops, entrance halls, apartments
Housing: aluminium, painted structure, mat
Color (.XX):
 White RAL9016 (.01)
 Grey RAL9006 (.02)
 Black RAL9005 (.03)
 White RAL9016/Black RAL9005 (.24)
Optics: glass lampshade
Source: LED, CRI>90, lifetime (L80B10) 60,000 operating hours (.YYY - 930; 940)
Power supply: complete with power supply ON/OFF or DALI

The luminaire equipped with electrical suspension set and a 3000mm long braided power cord.



Ref. no.	Name	Diameter	Light source	Power	Luminous flux	Color temperature	CRI	Efficacy	Power supply
10.073.3001.XX	GOLF	200mm	E27	-	-	3000K/4000K	>90	-	-
10.073.3002.XX	GOLF	300mm	E27	-	-	3000K/4000K	>90	-	-
10.073.3003.XX.YYY	GOLF	300mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	ON/OFF
10.073.3003.XX.YYY.DALI	GOLF	300mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	DALI
10.073.3004.XX	GOLF	400mm	E27	-	-	3000K/4000K	>90	-	-
10.073.3005.XX.YYY	GOLF	400mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	ON/OFF
10.073.3005.XX.YYY.DALI	GOLF	400mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	DALI
10.073.3006.XX	GOLF	500mm	E27	-	-	3000K/4000K	>90	-	-
10.073.3007.XX.YYY	GOLF	500mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	ON/OFF
10.073.3007.XX.YYY.DALI	GOLF	500mm	LED	19W	1600lm	3000K/4000K	>90	85lm/W	DALI

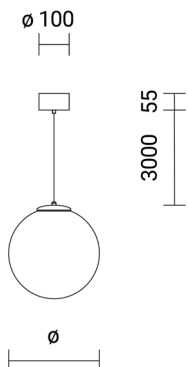

.XX - luminaire colour

.YYY - CRI/Tb

The data given in the table refer to LED 3000K CRI>90