

Application: offices, shops, entrance lobbies, apartments

Housing: die-cast aluminum, painted, mat

Optic: Lens

(XX) Color:

white RAL9016 (01),

black RAL9005 (03)

Light source: 830

Lifetime: L90B20 50000h

Color rendering index CRI: >80

Color temperature: 3000K




Power supply: ON/OFF; DALI



Code	Optic	Length	Power	Luminous flux	Efficacy	Control
36.0101.XX.830	PLX	205mm	8W	430lm	54lm/W	ON/OFF
36.0101.XX.830.DALI	PLX	205mm	8W	430lm	54lm/W	DALI
36.0102.XX.830	PLX	407mm	12W	850lm	71lm/W	ON/OFF
36.0102.XX.830.DALI	PLX	407mm	12W	850lm	71lm/W	DALI
36.0103.XX.830	PLX	800mm	22W	1700lm	77lm/W	ON/OFF
36.0103.XX.830.DALI	PLX	800mm	22W	1700lm	77lm/W	DALI

.XX - Luminaire color

The data given in the table refer to LED 3000K CRI>80

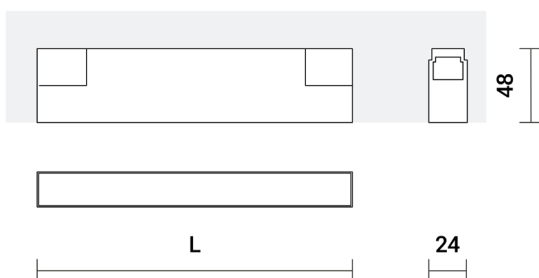

All dimensions and technical data provided are for guidance purposes only. Actual data may differ slightly due to the production process. In particular specifications such as power, lumen output and weight are subject to measurement tolerances and may differ slightly depending on the product variant. Pictures are used to illustrate products and colours. Finish, colour and appearance of the Optic are dependant on the chosen luminaire and can look differently than on the picture. Spectra Lighting reserves the right to change the presented materials and product specifications without prior notice