



Application: offices, shops, entrance lobbies, apartments

Housing: die-cast aluminum, painted, mat

Optic: Lens

(XX) Color:

(01) white,

(03) black,

(31) black ring/white body

Light source: 830

Lifetime: L90B20 50000h

Color rendering index CRI: >80

Color temperature: 3000K




Power supply: ON/OFF; DALI



Code	Optic	Power	Luminous flux	Efficacy	Control
36.0230.XX.830	27°	4W	160lm	40lm/W	ON/OFF
36.0230.XX.830.DALI	27°	4W	160lm	40lm/W	DALI

.XX - Luminaire color

The data given in the table refer to LED 3000K CRI>80

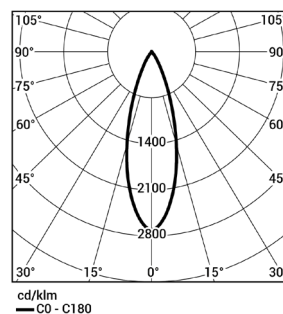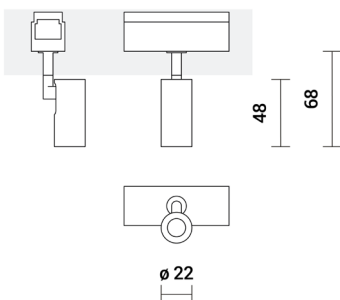

All dimensions and technical data provided are for guidance purposes only. Actual data may differ slightly due to the production process. In particular specifications such as power, lumen output and weight are subject to measurement tolerances and may differ slightly depending on the product variant. Pictures are used to illustrate products and colours. Finish, colour and appearance of the Optic are dependant on the chosen luminaire and can look differently than on the picture. Spectra Lighting reserves the right to change the presented materials and product specifications without prior notice



Application: offices, shops, entrance lobbies, apartments

Housing: die-cast aluminum, painted, mat

Optic: Lens

(XX) Color:

(01) white,

(03) black,

(31) black ring/white body

Light source: 830

Lifetime: L90B20 50000h

Color rendering index CRI: >80

Color temperature: 3000K




Power supply: ON/OFF; DALI




Code	Optic	Power	Luminous flux	Efficacy	Control
36.0136.XX.830	37°	9W	550lm	61lm/W	ON/OFF
36.0136.XX.830.DALI	37°	9W	550lm	61lm/W	DALI

.XX - Luminaire color

The data given in the table refer to LED 3000K CRI>80

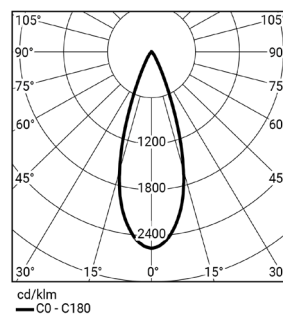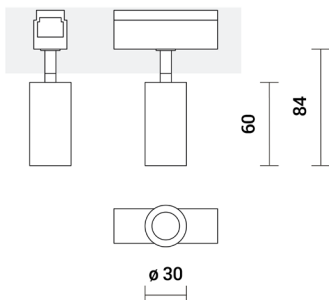

All dimensions and technical data provided are for guidance purposes only. Actual data may differ slightly due to the production process. In particular specifications such as power, lumen output and weight are subject to measurement tolerances and may differ slightly depending on the product variant. Pictures are used to illustrate products and colours. Finish, colour and appearance of the Optic are dependant on the chosen luminaire and can look differently than on the picture. Spectra Lighting reserves the right to change the presented materials and product specifications without prior notice

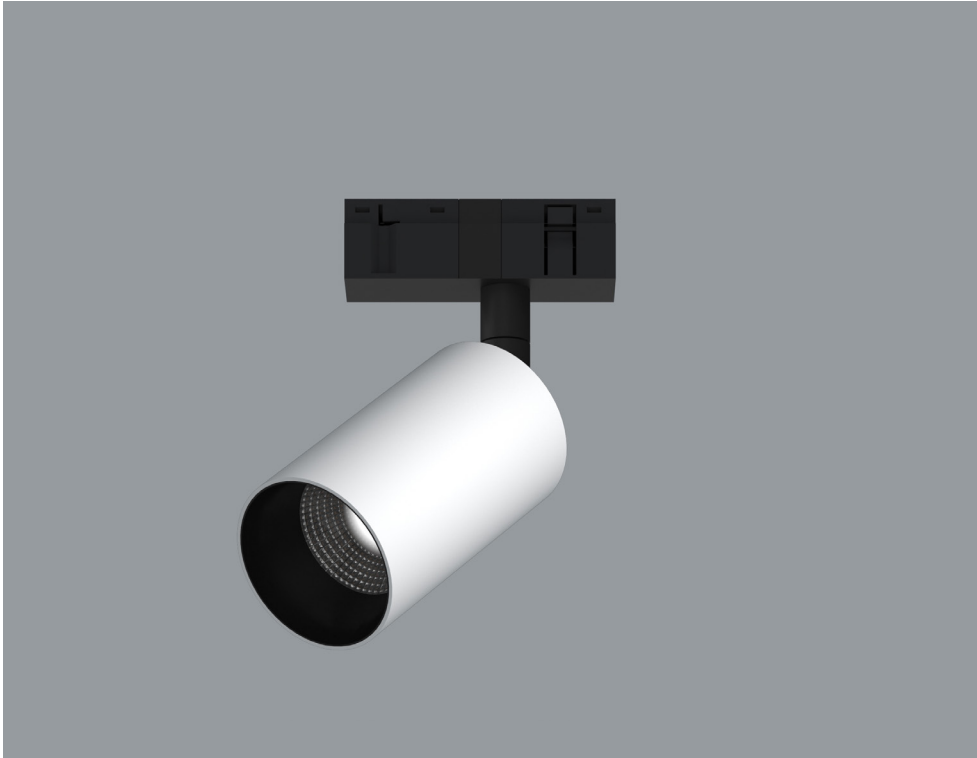

Application: offices, shops, entrance lobbies, apartments

Housing: die-cast aluminum, painted, mat

Optic: Lens

(XX) Color:

(01) white,

(03) black,

(31) black ring/white body

Light source: 830

Lifetime: L90B20 50000h

Color rendering index CRI: >80

Color temperature: 3000K



Power supply: ON/OFF; DALI




Code	Optic	Power	Luminous flux	Efficacy	Control
36.0141.XX.830	34°	15W	1100lm	73lm/W	ON/OFF
36.0141.XX.830.DALI	34°	15W	1100lm	73lm/W	DALI

.XX - Luminaire color


The data given in the table refer to LED 3000K CRI>80

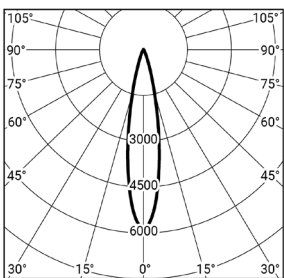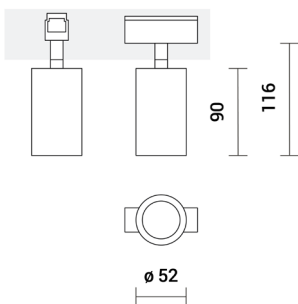


Spot
21°

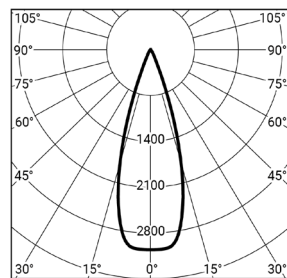

Medium
34°

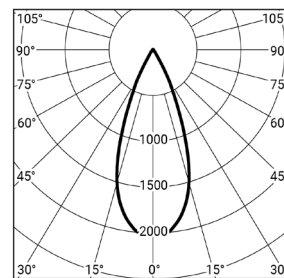

Wide Flood
42°



All dimensions and technical data provided are for guidance purposes only. Actual data may differ slightly due to the production process. In particular specifications such as power, lumen output and weight are subject to measurement tolerances and may differ slightly depending on the product variant. Pictures are used to illustrate products and colours. Finish, colour and appearance of the Optic are dependant on the chosen luminaire and can look differently than on the picture. Spectra Lighting reserves the right to change the presented materials and product specifications without prior notice



Application: offices, shops, entrance lobbies, apartments

Housing: die-cast aluminum, painted, mat

Optic: Lens

(XX) Color:

(01) white,

(03) black,

(31) black ring/white body

Light source: 830

Lifetime: L90B20 50000h

Color rendering index CRI: >80

Color temperature: 3000K



Power supply: ON/OFF; DALI




Code	Optic	Power	Luminous flux	Efficacy	Control
36.0146.XX.830	34°	21W	1600lm	76lm/W	ON/OFF
36.0146.XX.830.DALI	34°	21W	1600lm	76lm/W	DALI

.XX - Luminaire color


The data given in the table refer to LED 3000K CRI>80

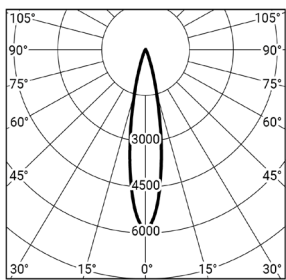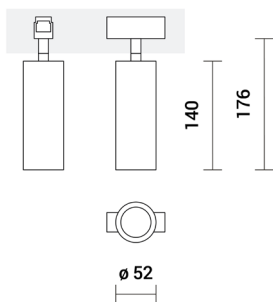


Spot
21°

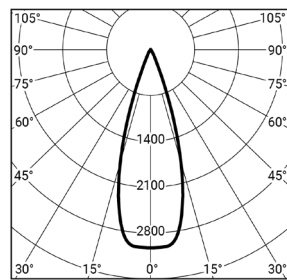

Medium
34°

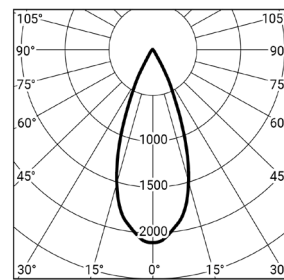

Wide Flood
42°



All dimensions and technical data provided are for guidance purposes only. Actual data may differ slightly due to the production process. In particular specifications such as power, lumen output and weight are subject to measurement tolerances and may differ slightly depending on the product variant. Pictures are used to illustrate products and colours. Finish, colour and appearance of the Optic are dependant on the chosen luminaire and can look differently than on the picture. Spectra Lighting reserves the right to change the presented materials and product specifications without prior notice