

Application: offices, shops, entrance halls, apartments

Housing: aluminum casting, anodized aluminum or painted structure, mat

Color (.XX):

White RAL9016 (.RAL9016)

Black RAL 9005 (.RAL9005)

RAL on request (.RALXXXX)

Anodized aluminum (.W15)

Optics: Louvre

Source: LED Linear, CRI> 80, lifetime (L80B10)

60,000 operating hours

(.YYY - 830; 840; 930; 940)

Power supply: electronic, complete with power supply ON / OFF (standard)

Other: DALI power supply, LED CRI> 90



Code	Name	Length	Power	Luminous flux	Color temperature	CRI	Efficacy	Power Voltage
09.003.1601.XX.YYY	PROFILITE 60 LOUVRE	561mm	10W	1050lm	3000K/4000K	>80	107lm/W	230V AC
09.003.1611.XX.YYY	PROFILITE 60 LOUVRE	561mm	15W	1550lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1621.XX.YYY	PROFILITE 60 LOUVRE	561mm	24W	2450lm	3000K/4000K	>80	100lm/W	230V AC
09.003.1602.XX.YYY	PROFILITE 60 LOUVRE	841mm	15W	1550lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1612.XX.YYY	PROFILITE 60 LOUVRE	841mm	22W	2300lm	3000K/4000K	>80	104lm/W	230V AC
09.003.1622.XX.YYY	PROFILITE 60 LOUVRE	841mm	38W	3600lm	3000K/4000K	>80	93lm/W	230V AC
09.003.1603.XX.YYY	PROFILITE 60 LOUVRE	1121mm	20W	2050lm	3000K/4000K	>80	103lm/W	230V AC
09.003.1613.XX.YYY	PROFILITE 60 LOUVRE	1121mm	31W	3050lm	3000K/4000K	>80	99lm/W	230V AC
09.003.1623.XX.YYY	PROFILITE 60 LOUVRE	1121mm	51W	4800lm	3000K/4000K	>80	94lm/W	230V AC
09.003.1604.XX.YYY	PROFILITE 60 LOUVRE	1401mm	24W	2550lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1614.XX.YYY	PROFILITE 60 LOUVRE	1401mm	37W	3800lm	3000K/4000K	>80	104lm/W	230V AC
09.003.1624.XX.YYY	PROFILITE 60 LOUVRE	1401mm	64W	6050lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1605.XX.YYY	PROFILITE 60 LOUVRE	1681mm	29W	3150lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1615.XX.YYY	PROFILITE 60 LOUVRE	1681mm	43W	4600lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1625.XX.YYY	PROFILITE 60 LOUVRE	1681mm	76W	7200lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1606.XX.YYY	PROFILITE 60 LOUVRE	1961mm	34W	3600lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1616.XX.YYY	PROFILITE 60 LOUVRE	1961mm	51W	5350lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1626.XX.YYY	PROFILITE 60 LOUVRE	1961mm	89W	8400lm	3000K/4000K	>80	95lm/W	230V AC




Code	Name	Length	Power	Luminous flux	Color temperature	CRI	Efficacy	Power Voltage
09.003.1607.XX.YYY	PROFILITE 60 LOUVRE	2241mm	39W	4100lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1617.XX.YYY	PROFILITE 60 LOUVRE	2241mm	58W	6100lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1627.XX.YYY	PROFILITE 60 LOUVRE	2241mm	101W	9600lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1608.XX.YYY	PROFILITE 60 LOUVRE	2521mm	43W	4600lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1618.XX.YYY	PROFILITE 60 LOUVRE	2521mm	65W	6850lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1628.XX.YYY	PROFILITE 60 LOUVRE	2521mm	114W	10800lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1609.XX.YYY	PROFILITE 60 LOUVRE	2801mm	48W	5150lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1619.XX.YYY	PROFILITE 60 LOUVRE	2801mm	72W	7650lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1629.XX.YYY	PROFILITE 60 LOUVRE	2801mm	126W	12000lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1630.XX.YYY	PROFILITE 60 LOUVRE	3081mm	53W	5650lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1634.XX.YYY	PROFILITE 60 LOUVRE	3081mm	80W	8400lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1638.XX.YYY	PROFILITE 60 LOUVRE	3081mm	139W	13200lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1631.XX.YYY	PROFILITE 60 LOUVRE	3361mm	58W	6150lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1635.XX.YYY	PROFILITE 60 LOUVRE	3361mm	87W	9150lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1639.XX.YYY	PROFILITE 60 LOUVRE	3361mm	152W	14450lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1632.XX.YYY	PROFILITE 60 LOUVRE	3641mm	63W	6700lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1636.XX.YYY	PROFILITE 60 LOUVRE	3641mm	94W	9900lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1640.XX.YYY	PROFILITE 60 LOUVRE	3641mm	164W	15650lm	3000K/4000K	>80	95lm/W	230V AC
09.003.1633.XX.YYY	PROFILITE 60 LOUVRE	3921mm	68W	7200lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1637.XX.YYY	PROFILITE 60 LOUVRE	3921mm	101W	10700lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1641.XX.YYY	PROFILITE 60 LOUVRE	3921mm	177W	16850lm	3000K/4000K	>80	95lm/W	230V AC

To obtain the total length of the fitting, the thickness of selected end caps should be added to the above dimensions - see accessories


.XX - luminaire colour

.YYY - CRI/Tb

The data given in the table refer to LED 3000K CRI>80

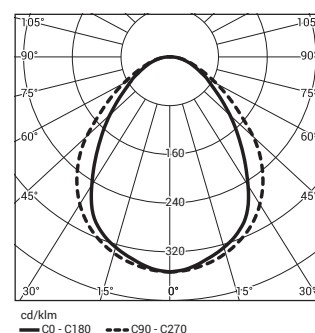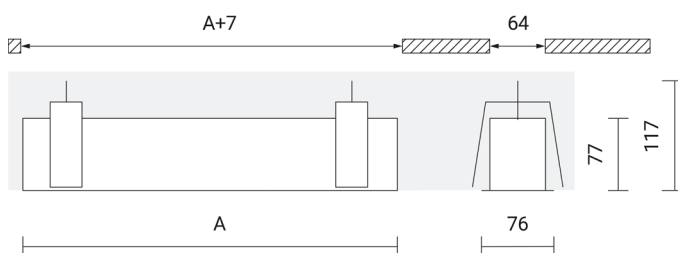

Endcaps - 2 pcs



Ref. no.	Name	Weight
09.003.1801.01	Endcap aluminum, white RAL9016; g=10mm, set 2 pcs	0,04kg
09.003.1801.02	Endcap aluminum, grey RAL9006; g=10mm, set 2 pcs	0,04kg
09.003.1801.03	Endcap aluminum, black RAL9005; g=10mm, set 2 pcs	0,04kg
09.003.1801.04	Endcap aluminum, anodized aluminium; g=10mm, set 2 pcs	0,04kg

Endcaps IP44 - 2 pcs



Ref. no.	Name	Weight
09.003.1802.01	Endcap IP44 aluminum, white RAL9016; g=10mm, set 2 pcs	0,06kg
09.003.1802.02	Endcap IP44 aluminum, grey RAL9006; g=10mm, set 2 pcs	0,06kg
09.003.1802.03	Endcap IP44 aluminum, black RAL9005; g=10mm, set 2 pcs	0,06kg
09.003.1802.04	Endcap IP44 aluminum, anodized aluminium; g=10mm, set 2 pcs	0,06kg

Linear connector




Ref. no.	09.003.2901.00
Weight	0,05 kg

Electrical suspension set




Ref. no.	Name		Weight
12.000.3011.XX	3x1.5mm ² , Ø70mm, L=1200mm	ON/OFF	0,2kg
12.000.3012.XX	3x1.5mm ² , Ø70mm, L=3000mm	ON/OFF	0,2kg
12.000.3013.XX	3x1.5mm ² , Ø70mm, L=5000mm	ON/OFF	0,2kg
12.000.3014.XX	5x1.5mm ² , Ø70mm, L=1200mm	DALI	0,2kg
12.000.3015.XX	5x1.5mm ² , Ø70mm, L=3000mm	DALI	0,2kg
12.000.3016.XX	5x1.5mm ² , Ø70mm, L=5000mm	DALI	0,2kg

Suspension set




Ref. no.	Name	Weight
70.0031	L=1200mm	0,08kg
70.0032	L=3000mm	0,08kg
70.0033	L=5000mm	0,08kg

Pass-through wiring

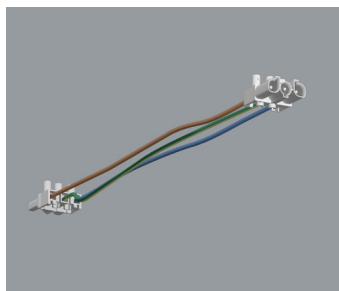

Ref. no.	Name		
09.003.4500002	Pass-through wiring 2 xLED 3x0.75mm ²	560mm	ON/OFF
09.003.4500003	Pass-through wiring 3 xLED 3x0.75mm ²	840mm	ON/OFF
09.003.4500004	Pass-through wiring 4 xLED 3x0.75mm ²	1120mm	ON/OFF
09.003.4500005	Pass-through wiring 5 xLED 3x0.75mm ²	1400mm	ON/OFF
09.003.4500006	Pass-through wiring 6 xLED 3x0.75mm ²	1680mm	ON/OFF
09.003.4500007	Pass-through wiring 7 xLED 3x0.75mm ²	1960mm	ON/OFF
09.003.4500008	Pass-through wiring 8 xLED 3x0.75mm ²	2240mm	ON/OFF
09.003.4500021	Pass-through wiring 9 xLED 3x0.75mm ²	2520mm	ON/OFF
09.003.4500022	Pass-through wiring 10 xLED 3x0.75mm ²	2800mm	ON/OFF
09.003.4500023	Pass-through wiring 11 xLED 3x0.75mm ²	3080mm	ON/OFF
09.003.4500024	Pass-through wiring 12 xLED 3x0.75mm ²	3360mm	ON/OFF
09.003.4500025	Pass-through wiring 13 xLED 3x0.75mm ²	3640mm	ON/OFF
09.003.4500026	Pass-through wiring 14 xLED 3x0.75mm ²	3920mm	ON/OFF

Pass-through wiring

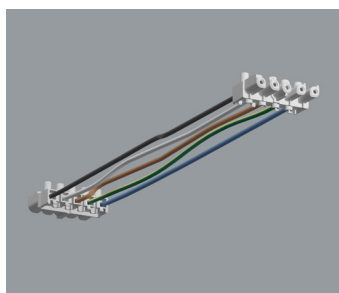

Ref. no.	Name		
09.003.4500012	Pass-through wiring 2 xLED 5x0.75mm ²	560mm	DALI
09.003.4500013	Pass-through wiring 3 xLED 5x0.75mm ²	840mm	DALI
09.003.4500014	Pass-through wiring 4 xLED 5x0.75mm ²	1120mm	DALI
09.003.4500015	Pass-through wiring 5 xLED 5x0.75mm ²	1400mm	DALI
09.003.4500016	Pass-through wiring 6 xLED 5x0.75mm ²	1680mm	DALI
09.003.4500017	Pass-through wiring 7 xLED 5x0.75mm ²	1960mm	DALI
09.003.4500018	Pass-through wiring 8 xLED 5x0.75mm ²	2240mm	DALI
09.003.4500031	Pass-through wiring 9 xLED 5x0.75mm ²	2520mm	DALI
09.003.4500032	Pass-through wiring 10 xLED 5x0.75mm ²	2800mm	DALI
09.003.4500033	Pass-through wiring 11 xLED 5x0.75mm ²	3080mm	DALI
09.003.4500034	Pass-through wiring 12 xLED 5x0.75mm ²	3360mm	DALI
09.003.4500035	Pass-through wiring 13 xLED 5x0.75mm ²	3640mm	DALI
09.003.4500036	Pass-through wiring 14 xLED 5x0.75mm ²	3920mm	DALI