



Application: offices, shops, entrance halls, apartments

Housing: aluminum casting, anodized aluminum or painted structure, mat

Color (.XX):

White RAL9016 (.RAL9016)

Black RAL 9005 (.RAL9005)

RAL on request (.RALXXXX)

Anodized aluminum (.W15)

Optics: PMMA Micro-P

Source: LED Linear, CRI> 80, lifetime (L80B10)

60,000 operating hours

(.YYY - 830; 840; 930; 940)

Power supply: electronic, complete with power supply ON / OFF (standard)

Other: DALI power supply, LED CRI> 90,

LED Tunable White



Code	Name	Length	Power	Luminous flux	Color temperature	CRI	Efficacy	Power Voltage
09.003.1201.XX.YYY	PROFILITE 60 Micro-P	561mm	9W	950lm	3000K/4000K	>80	106lm/W	230V AC
09.003.1211.XX.YYY	PROFILITE 60 Micro-P	561mm	16W	1750lm	3000K/4000K	>80	109lm/W	230V AC
09.003.1221.XX.YYY	PROFILITE 60 Micro-P	561mm	28W	2950lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1202.XX.YYY	PROFILITE 60 Micro-P	841mm	14W	1500lm	3000K/4000K	>80	107lm/W	230V AC
09.003.1212.XX.YYY	PROFILITE 60 Micro-P	841mm	23W	2600lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1222.XX.YYY	PROFILITE 60 Micro-P	841mm	43W	4350lm	3000K/4000K	>80	101lm/W	230V AC
09.003.1203.XX.YYY	PROFILITE 60 Micro-P	1121mm	18W	1950lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1213.XX.YYY	PROFILITE 60 Micro-P	1121mm	32W	3450lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1223.XX.YYY	PROFILITE 60 Micro-P	1121mm	57W	5850lm	3000K/4000K	>80	103lm/W	230V AC
09.003.1204.XX.YYY	PROFILITE 60 Micro-P	1401mm	23W	2600lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1214.XX.YYY	PROFILITE 60 Micro-P	1401mm	40W	4300lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1224.XX.YYY	PROFILITE 60 Micro-P	1401mm	71W	7300lm	3000K/4000K	>80	103lm/W	230V AC
09.003.1205.XX.YYY	PROFILITE 60 Micro-P	1681mm	26W	3050lm	3000K/4000K	>80	117lm/W	230V AC
09.003.1215.XX.YYY	PROFILITE 60 Micro-P	1681mm	48W	5200lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1225.XX.YYY	PROFILITE 60 Micro-P	1681mm	87W	8750lm	3000K/4000K	>80	101lm/W	230V AC

To obtain the total length of the fitting, the thickness of selected end caps should be added to the above dimensions - see accessories

.XX - luminaire colour

The data given in the table refer to LED 3000K CRI>80




Code	Name	Length	Power	Luminous flux	Color temperature	CRI	Efficacy	Power Voltage
09.003.1206.XX.YYY	PROFILITE 60 Micro-P	1961mm	33W	3450lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1216.XX.YYY	PROFILITE 60 Micro-P	1961mm	56W	6100lm	3000K/4000K	>80	109lm/W	230V AC
09.003.1226.XX.YYY	PROFILITE 60 Micro-P	1961mm	99W	10200lm	3000K/4000K	>80	103lm/W	230V AC
09.003.1207.XX.YYY	PROFILITE 60 Micro-P	2241mm	36W	3900lm	3000K/4000K	>80	108lm/W	230V AC
09.003.1217.XX.YYY	PROFILITE 60 Micro-P	2241mm	67W	6950lm	3000K/4000K	>80	104lm/W	230V AC
09.003.1227.XX.YYY	PROFILITE 60 Micro-P	2241mm	113W	11650lm	3000K/4000K	>80	103lm/W	230V AC
09.003.1208.XX.YYY	PROFILITE 60 Micro-P	2521mm	41W	4300lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1218.XX.YYY	PROFILITE 60 Micro-P	2521mm	72W	7750lm	3000K/4000K	>80	115lm/W	230V AC
09.003.1228.XX.YYY	PROFILITE 60 Micro-P	2521mm	129W	13100lm	3000K/4000K	>80	109lm/W	230V AC
09.003.1209.XX.YYY	PROFILITE 60 Micro-P	2801mm	45W	4750lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1219.XX.YYY	PROFILITE 60 Micro-P	2801mm	80W	8500lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1229.XX.YYY	PROFILITE 60 Micro-P	2801mm	143W	14600lm	3000K/4000K	>80	110lm/W	230V AC
09.003.1230.XX.YYY	PROFILITE 60 Micro-P	3081mm	50W	5200lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1234.XX.YYY	PROFILITE 60 Micro-P	3081mm	88W	9450lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1238.XX.YYY	PROFILITE 60 Micro-P	3081mm	157W	16050lm	3000K/4000K	>80	110lm/W	230V AC
09.003.1231.XX.YYY	PROFILITE 60 Micro-P	3361mm	54W	5650lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1235.XX.YYY	PROFILITE 60 Micro-P	3361mm	96W	10450lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1239.XX.YYY	PROFILITE 60 Micro-P	3361mm	171W	17500lm	3000K/4000K	>80	110lm/W	230V AC
09.003.1232.XX.YYY	PROFILITE 60 Micro-P	3641mm	59W	6200lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1236.XX.YYY	PROFILITE 60 Micro-P	3641mm	104W	11300lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1240.XX.YYY	PROFILITE 60 Micro-P	3641mm	186W	18950lm	3000K/4000K	>80	109lm/W	230V AC
09.003.1233.XX.YYY	PROFILITE 60 Micro-P	3921mm	64W	6700lm	3000K/4000K	>80	105lm/W	230V AC
09.003.1237.XX.YYY	PROFILITE 60 Micro-P	3921mm	112W	12200lm	3000K/4000K	>80	113lm/W	230V AC
09.003.1241.XX.YYY	PROFILITE 60 Micro-P	3921mm	200W	20400lm	3000K/4000K	>80	110lm/W	230V AC

To obtain the total length of the fitting, the thickness of selected end caps should be added to the above dimensions - see accessories


.XX - luminaire colour

.YYY - CRI/Tb

The data given in the table refer to LED 3000K CRI>80

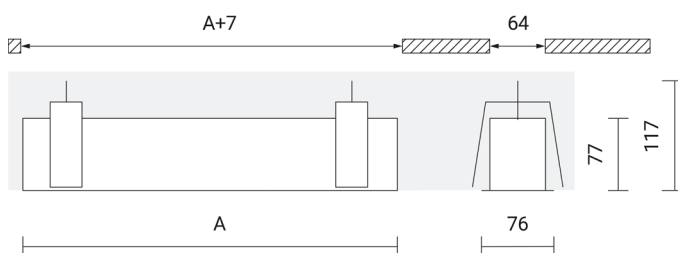

Endcaps - 2 pcs



Ref. no.	Name	Weight
09.003.1801.01	Endcap aluminum, white RAL9016; g=10mm, set 2 pcs	0,04kg
09.003.1801.02	Endcap aluminum, grey RAL9006; g=10mm, set 2 pcs	0,04kg
09.003.1801.03	Endcap aluminum, black RAL9005; g=10mm, set 2 pcs	0,04kg
09.003.1801.04	Endcap aluminum, anodized aluminium; g=10mm, set 2 pcs	0,04kg

Endcaps IP44 - 2 pcs



Ref. no.	Name	Weight
09.003.1802.01	Endcap IP44 aluminum, white RAL9016; g=10mm, set 2 pcs	0,06kg
09.003.1802.02	Endcap IP44 aluminum, grey RAL9006; g=10mm, set 2 pcs	0,06kg
09.003.1802.03	Endcap IP44 aluminum, black RAL9005; g=10mm, set 2 pcs	0,06kg
09.003.1802.04	Endcap IP44 aluminum, anodized aluminium; g=10mm, set 2 pcs	0,06kg

Linear connector




Ref. no.	09.003.2901.00
Weight	0,05 kg

Electrical suspension set




Ref. no.	Name		Weight
12.000.3011.XX	3x1.5mm ² , Ø70mm, L=1200mm	ON/OFF	0,2kg
12.000.3012.XX	3x1.5mm ² , Ø70mm, L=3000mm	ON/OFF	0,2kg
12.000.3013.XX	3x1.5mm ² , Ø70mm, L=5000mm	ON/OFF	0,2kg
12.000.3014.XX	5x1.5mm ² , Ø70mm, L=1200mm	DALI	0,2kg
12.000.3015.XX	5x1.5mm ² , Ø70mm, L=3000mm	DALI	0,2kg
12.000.3016.XX	5x1.5mm ² , Ø70mm, L=5000mm	DALI	0,2kg

Suspension set




Ref. no.	Name	Weight
70.0031	L=1200mm	0,08kg
70.0032	L=3000mm	0,08kg
70.0033	L=5000mm	0,08kg

Pass-through wiring



Ref. no.	Name		
09.003.4500002	Pass-through wiring 2 xLED 3x0.75mm ²	560mm	ON/OFF
09.003.4500003	Pass-through wiring 3 xLED 3x0.75mm ²	840mm	ON/OFF
09.003.4500004	Pass-through wiring 4 xLED 3x0.75mm ²	1120mm	ON/OFF
09.003.4500005	Pass-through wiring 5 xLED 3x0.75mm ²	1400mm	ON/OFF
09.003.4500006	Pass-through wiring 6 xLED 3x0.75mm ²	1680mm	ON/OFF
09.003.4500007	Pass-through wiring 7 xLED 3x0.75mm ²	1960mm	ON/OFF
09.003.4500008	Pass-through wiring 8 xLED 3x0.75mm ²	2240mm	ON/OFF
09.003.4500021	Pass-through wiring 9 xLED 3x0.75mm ²	2520mm	ON/OFF
09.003.4500022	Pass-through wiring 10 xLED 3x0.75mm ²	2800mm	ON/OFF
09.003.4500023	Pass-through wiring 11 xLED 3x0.75mm ²	3080mm	ON/OFF
09.003.4500024	Pass-through wiring 12 xLED 3x0.75mm ²	3360mm	ON/OFF
09.003.4500025	Pass-through wiring 13 xLED 3x0.75mm ²	3640mm	ON/OFF
09.003.4500026	Pass-through wiring 14 xLED 3x0.75mm ²	3920mm	ON/OFF

Pass-through wiring



Ref. no.	Name		
09.003.4500012	Pass-through wiring 2 xLED 5x0.75mm ²	560mm	DALI
09.003.4500013	Pass-through wiring 3 xLED 5x0.75mm ²	840mm	DALI
09.003.4500014	Pass-through wiring 4 xLED 5x0.75mm ²	1120mm	DALI
09.003.4500015	Pass-through wiring 5 xLED 5x0.75mm ²	1400mm	DALI
09.003.4500016	Pass-through wiring 6 xLED 5x0.75mm ²	1680mm	DALI
09.003.4500017	Pass-through wiring 7 xLED 5x0.75mm ²	1960mm	DALI
09.003.4500018	Pass-through wiring 8 xLED 5x0.75mm ²	2240mm	DALI
09.003.4500031	Pass-through wiring 9 xLED 5x0.75mm ²	2520mm	DALI
09.003.4500032	Pass-through wiring 10 xLED 5x0.75mm ²	2800mm	DALI
09.003.4500033	Pass-through wiring 11 xLED 5x0.75mm ²	3080mm	DALI
09.003.4500034	Pass-through wiring 12 xLED 5x0.75mm ²	3360mm	DALI
09.003.4500035	Pass-through wiring 13 xLED 5x0.75mm ²	3640mm	DALI
09.003.4500036	Pass-through wiring 14 xLED 5x0.75mm ²	3920mm	DALI