

Application: offices, shops, entrance halls, apartments

Housing: aluminum casting, anodized aluminum or painted structure, mat

Color (.XX):

White RAL9016 (.RAL9016)

Black RAL 9005 (.RAL9005)

RAL on request (.RALXXXX)

Anodized aluminum (.W15)

Optics: PMMA PLX

Source: LED Linear, CRI> 80, lifetime (L80B10)

60,000 operating hours

(.YYY - 830; 840; 930; 940)

Power supply: electronic, complete with power supply ON / OFF (standard)

Other: DALI power supply, LED CRI> 90,

LED Tunable White



| Code | Name | Length | Power | Luminous flux | Color temperature | CRI | Efficacy | Power Voltage |
|--------------------|------------------|--------|-------|---------------|-------------------|-----|----------|---------------|
| 09.003.1101.XX.YYY | PROFILITE 60 PLX | 561mm | 9W | 1050lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1111.XX.YYY | PROFILITE 60 PLX | 561mm | 16W | 1900lm | 3000K/4000K | >80 | 119lm/W | 230V AC |
| 09.003.1121.XX.YYY | PROFILITE 60 PLX | 561mm | 28W | 3200lm | 3000K/4000K | >80 | 114lm/W | 230V AC |
| 09.003.1102.XX.YYY | PROFILITE 60 PLX | 841mm | 14W | 1600lm | 3000K/4000K | >80 | 114lm/W | 230V AC |
| 09.003.1112.XX.YYY | PROFILITE 60 PLX | 841mm | 23W | 2800lm | 3000K/4000K | >80 | 122lm/W | 230V AC |
| 09.003.1122.XX.YYY | PROFILITE 60 PLX | 841mm | 43W | 4650lm | 3000K/4000K | >80 | 108lm/W | 230V AC |
| 09.003.1103.XX.YYY | PROFILITE 60 PLX | 1121mm | 18W | 2100lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1113.XX.YYY | PROFILITE 60 PLX | 1121mm | 32W | 3700lm | 3000K/4000K | >80 | 116lm/W | 230V AC |
| 09.003.1123.XX.YYY | PROFILITE 60 PLX | 1121mm | 57W | 6250lm | 3000K/4000K | >80 | 110lm/W | 230V AC |
| 09.003.1104.XX.YYY | PROFILITE 60 PLX | 1401mm | 23W | 2800lm | 3000K/4000K | >80 | 122lm/W | 230V AC |
| 09.003.1114.XX.YYY | PROFILITE 60 PLX | 1401mm | 40W | 4550lm | 3000K/4000K | >80 | 114lm/W | 230V AC |
| 09.003.1124.XX.YYY | PROFILITE 60 PLX | 1401mm | 71W | 7850lm | 3000K/4000K | >80 | 111lm/W | 230V AC |
| 09.003.1105.XX.YYY | PROFILITE 60 PLX | 1681mm | 26W | 3250lm | 3000K/4000K | >80 | 125lm/W | 230V AC |
| 09.003.1115.XX.YYY | PROFILITE 60 PLX | 1681mm | 48W | 5600lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1125.XX.YYY | PROFILITE 60 PLX | 1681mm | 87W | 9400lm | 3000K/4000K | >80 | 108lm/W | 230V AC |

To obtain the total length of the fitting, the thickness of selected end caps should be added to the above dimensions - see accessories

.XX - luminaire colour

.YYY - CRI/Tb

The data given in the table refer to LED 3000K CRI>80




| Code | Name | Length | Power | Luminous flux | Color temperature | CRI | Efficacy | Power Voltage |
|--------------------|------------------|--------|-------|---------------|-------------------|-----|----------|---------------|
| 09.003.1106.XX.YYY | PROFILITE 60 PLX | 1961mm | 33W | 3700lm | 3000K/4000K | >80 | 112lm/W | 230V AC |
| 09.003.1116.XX.YYY | PROFILITE 60 PLX | 1961mm | 56W | 6550lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1126.XX.YYY | PROFILITE 60 PLX | 1961mm | 99W | 10950lm | 3000K/4000K | >80 | 111lm/W | 230V AC |
| 09.003.1107.XX.YYY | PROFILITE 60 PLX | 2241mm | 36W | 4200lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1117.XX.YYY | PROFILITE 60 PLX | 2241mm | 67W | 7450lm | 3000K/4000K | >80 | 111lm/W | 230V AC |
| 09.003.1127.XX.YYY | PROFILITE 60 PLX | 2241mm | 113W | 12550lm | 3000K/4000K | >80 | 111lm/W | 230V AC |
| 09.003.1108.XX.YYY | PROFILITE 60 PLX | 2521mm | 41W | 4600lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1118.XX.YYY | PROFILITE 60 PLX | 2521mm | 72W | 8300lm | 3000K/4000K | >80 | 115lm/W | 230V AC |
| 09.003.1128.XX.YYY | PROFILITE 60 PLX | 2521mm | 129W | 14100lm | 3000K/4000K | >80 | 109lm/W | 230V AC |
| 09.003.1109.XX.YYY | PROFILITE 60 PLX | 2801mm | 45W | 5100lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1119.XX.YYY | PROFILITE 60 PLX | 2801mm | 80W | 9100lm | 3000K/4000K | >80 | 114lm/W | 230V AC |
| 09.003.1129.XX.YYY | PROFILITE 60 PLX | 2801mm | 143W | 15650lm | 3000K/4000K | >80 | 110lm/W | 230V AC |
| 09.003.1130.XX.YYY | PROFILITE 60 PLX | 3081mm | 50W | 5600lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1134.XX.YYY | PROFILITE 60 PLX | 3081mm | 88W | 10150lm | 3000K/4000K | >80 | 115lm/W | 230V AC |
| 09.003.1138.XX.YYY | PROFILITE 60 PLX | 3081mm | 157W | 17200lm | 3000K/4000K | >80 | 110lm/W | 230V AC |
| 09.003.1131.XX.YYY | PROFILITE 60 PLX | 3361mm | 54W | 6050lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1135.XX.YYY | PROFILITE 60 PLX | 3361mm | 96W | 11200lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1139.XX.YYY | PROFILITE 60 PLX | 3361mm | 171W | 18800lm | 3000K/4000K | >80 | 110lm/W | 230V AC |
| 09.003.1132.XX.YYY | PROFILITE 60 PLX | 3641mm | 59W | 6650lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1136.XX.YYY | PROFILITE 60 PLX | 3641mm | 104W | 12100lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1140.XX.YYY | PROFILITE 60 PLX | 3641mm | 186W | 20350lm | 3000K/4000K | >80 | 109lm/W | 230V AC |
| 09.003.1133.XX.YYY | PROFILITE 60 PLX | 3921mm | 64W | 7150lm | 3000K/4000K | >80 | 113lm/W | 230V AC |
| 09.003.1137.XX.YYY | PROFILITE 60 PLX | 3921mm | 112W | 13050lm | 3000K/4000K | >80 | 117lm/W | 230V AC |
| 09.003.1141.XX.YYY | PROFILITE 60 PLX | 3921mm | 200W | 21900lm | 3000K/4000K | >80 | 110lm/W | 230V AC |

To obtain the total length of the fitting, the thickness of selected end caps should be added to the above dimensions - see accessories


.XX - luminaire colour

.YYY - CRI/Tb

The data given in the table refer to LED 3000K CRI>80

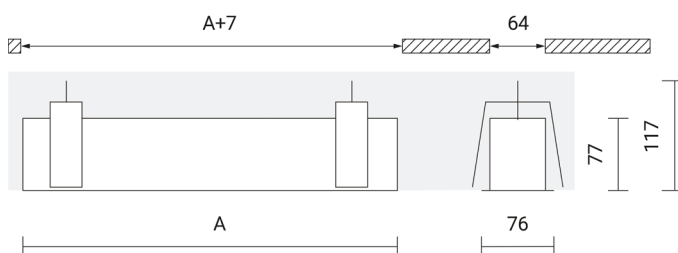

Endcaps - 2 pcs



| Ref. no. | Name | Weight |
|-----------------------|--|--------|
| 09.003.1801.01 | Endcap aluminum, white RAL9016; g=10mm, set 2 pcs | 0,04kg |
| 09.003.1801.02 | Endcap aluminum, grey RAL9006; g=10mm, set 2 pcs | 0,04kg |
| 09.003.1801.03 | Endcap aluminum, black RAL9005; g=10mm, set 2 pcs | 0,04kg |
| 09.003.1801.04 | Endcap aluminum, anodized aluminium; g=10mm, set 2 pcs | 0,04kg |

Endcaps IP44 - 2 pcs



| Ref. no. | Name | Weight |
|-----------------------|---|--------|
| 09.003.1802.01 | Endcap IP44 aluminum, white RAL9016; g=10mm, set 2 pcs | 0,06kg |
| 09.003.1802.02 | Endcap IP44 aluminum, grey RAL9006; g=10mm, set 2 pcs | 0,06kg |
| 09.003.1802.03 | Endcap IP44 aluminum, black RAL9005; g=10mm, set 2 pcs | 0,06kg |
| 09.003.1802.04 | Endcap IP44 aluminum, anodized aluminium; g=10mm, set 2 pcs | 0,06kg |

Linear connector




| | |
|-----------------|-----------------------|
| Ref. no. | 09.003.2901.00 |
| Weight | 0,05 kg |

Electrical suspension set




| Ref. no. | Name | | Weight |
|-----------------------|--|--------|--------|
| 12.000.3011.XX | 3x1.5mm ² , Ø70mm, L=1200mm | ON/OFF | 0,2kg |
| 12.000.3012.XX | 3x1.5mm ² , Ø70mm, L=3000mm | ON/OFF | 0,2kg |
| 12.000.3013.XX | 3x1.5mm ² , Ø70mm, L=5000mm | ON/OFF | 0,2kg |
| 12.000.3014.XX | 5x1.5mm ² , Ø70mm, L=1200mm | DALI | 0,2kg |
| 12.000.3015.XX | 5x1.5mm ² , Ø70mm, L=3000mm | DALI | 0,2kg |
| 12.000.3016.XX | 5x1.5mm ² , Ø70mm, L=5000mm | DALI | 0,2kg |

Suspension set




| Ref. no. | Name | Weight |
|----------------|----------|--------|
| 70.0031 | L=1200mm | 0,08kg |
| 70.0032 | L=3000mm | 0,08kg |
| 70.0033 | L=5000mm | 0,08kg |

Pass-through wiring



| Ref. no. | Name | | |
|----------------|---|--------|--------|
| 09.003.4500002 | Pass-through wiring 2 xLED 3x0.75mm ² | 560mm | ON/OFF |
| 09.003.4500003 | Pass-through wiring 3 xLED 3x0.75mm ² | 840mm | ON/OFF |
| 09.003.4500004 | Pass-through wiring 4 xLED 3x0.75mm ² | 1120mm | ON/OFF |
| 09.003.4500005 | Pass-through wiring 5 xLED 3x0.75mm ² | 1400mm | ON/OFF |
| 09.003.4500006 | Pass-through wiring 6 xLED 3x0.75mm ² | 1680mm | ON/OFF |
| 09.003.4500007 | Pass-through wiring 7 xLED 3x0.75mm ² | 1960mm | ON/OFF |
| 09.003.4500008 | Pass-through wiring 8 xLED 3x0.75mm ² | 2240mm | ON/OFF |
| 09.003.4500021 | Pass-through wiring 9 xLED 3x0.75mm ² | 2520mm | ON/OFF |
| 09.003.4500022 | Pass-through wiring 10 xLED 3x0.75mm ² | 2800mm | ON/OFF |
| 09.003.4500023 | Pass-through wiring 11 xLED 3x0.75mm ² | 3080mm | ON/OFF |
| 09.003.4500024 | Pass-through wiring 12 xLED 3x0.75mm ² | 3360mm | ON/OFF |
| 09.003.4500025 | Pass-through wiring 13 xLED 3x0.75mm ² | 3640mm | ON/OFF |
| 09.003.4500026 | Pass-through wiring 14 xLED 3x0.75mm ² | 3920mm | ON/OFF |

Pass-through wiring



| Ref. no. | Name | | |
|----------------|---|--------|------|
| 09.003.4500012 | Pass-through wiring 2 xLED 5x0.75mm ² | 560mm | DALI |
| 09.003.4500013 | Pass-through wiring 3 xLED 5x0.75mm ² | 840mm | DALI |
| 09.003.4500014 | Pass-through wiring 4 xLED 5x0.75mm ² | 1120mm | DALI |
| 09.003.4500015 | Pass-through wiring 5 xLED 5x0.75mm ² | 1400mm | DALI |
| 09.003.4500016 | Pass-through wiring 6 xLED 5x0.75mm ² | 1680mm | DALI |
| 09.003.4500017 | Pass-through wiring 7 xLED 5x0.75mm ² | 1960mm | DALI |
| 09.003.4500018 | Pass-through wiring 8 xLED 5x0.75mm ² | 2240mm | DALI |
| 09.003.4500031 | Pass-through wiring 9 xLED 5x0.75mm ² | 2520mm | DALI |
| 09.003.4500032 | Pass-through wiring 10 xLED 5x0.75mm ² | 2800mm | DALI |
| 09.003.4500033 | Pass-through wiring 11 xLED 5x0.75mm ² | 3080mm | DALI |
| 09.003.4500034 | Pass-through wiring 12 xLED 5x0.75mm ² | 3360mm | DALI |
| 09.003.4500035 | Pass-through wiring 13 xLED 5x0.75mm ² | 3640mm | DALI |
| 09.003.4500036 | Pass-through wiring 14 xLED 5x0.75mm ² | 3920mm | DALI |